



TOOLS
Helping you to take control.



Home of Quality.

Limitless possibilities!

Load grain, transport bales, remove silage, stack pallets, move tree-trunks and, and, and... and the best way to do all these is with a STOLL front-loader and the suitable tool we provide.

Whatever the task, STOLL has the solution. Tools have to stand up to the toughest demands. That's why, at STOLL, we rely on the best material quality and German Engineering in product development. Extensive practical trials guarantee a long working life for your STOLL tools.

STOLL engineers are always developing innovations to suit the changing times, meeting your requirements and making your life easier. Because your demands are what spur us on.







Tool handling made easy.



Tool locking with the push of a button, even more comfortable tool changing without dismounting — using HYDRO-LOCK.



For even quicker hydraulic tube connection, the Tool-Fix for tool connection is available.

Tool attachment – just a short pit-stop



Approach and hook in the front-loader



Roll back the tool – the locking mechanism will engage automatically



Couple the hydraulic connection



3rd/4th control circuit

- Simple operation of hydraulic tools
- The driver does not need an additional control device
- Necessary for work with e.g. silage forks, bale grabs or bale stackers



REAL³

- A genuine 3rd control circuit to control tools independently of the front-loader controls.
- The hydraulic pump in the tractor will supply the tool with oil directly.
- Tool functions can run simultaneously this makes all work faster and more effective



Double Locking

- Standard for FZ 60/60.1 + 80.1
- Optional for FZ 50/50.1
- For heavy work loads

Thanks to our versatile technologies, handling your tools is child's play. Because your time is worth gold.








A tough performer for your Profiline: the perfect bucket for every demand, versatile in use and strong in construction:

- High level of robustness, low wear and low weight thanks to the use of high quality steel.
- Easy work even with sticky products the conical shape, which opens up towards the cutting edge, makes this possible.
- The cutting edge can withstand the toughest stress day after day, year after year.





All buckets in full action!

ROBUST U – for universal, light to moderate use

Order no.	Width in m	Volume heaped in m ³	Volume level heap in m³	Cutting edge Brinell 500 HB	Weight in kg	
3428170	1,15	0,47	0,41	110x16	130	
3428180	1,30	0,51	0,44	110x16	132	
3428190	1,50	0,60	0,52	150x16	161	
3428200	1,70	0,68	0,59	150x16	176	
3428210	1,90	0,76	0,66	150x16	211	
3428220	2,05	0,82	0,71	150x16	225	
3428230	2,20	0,89	0,77	150x16	269	
3461720	2,40	0,94	0,82	150 x 20	310	

ROBUST M – specifically for the loading of loose bulk materials with low weight

Order no.	Width in m	Volume heaped in m ³	Volume level heap in m³	CUTTING EDGE Brinell 500 HB	Weight in kg	
3428330	2,05	1,45	1,13	150 x 16	320	
3429920	2,20	1,56	1,22	150 x 16	384	
3429930	2,40	1,70	1,33	200 x 20	432	
3429940	2,60	1,86	1,45	200 x 20	462	

ROBUST S – for working with heavy and sticky material, like wet earth or snow





Order no.	Width in m	Volume heaped in m³	Volume level heap in m ³	CUTTING EDGE Brinell 500 HB	Weight in kg	
3428260	1,50	0,60	0,52	150 x 16	172	
3428270	1,70	0,68	0,59	150 x 16	190	
3428280	1,90	0,74	0,64	150 x 20	242	
3428290	2,05	0,81	0,70	150 x 20	258	
3428300	2,20	0,87	0,76	150 x 20	308	
3428310	2,40	0,94	0,82	200 x 20	351	
3459310	2,60	1,01	0,88	200 x 20	376	

ROBUST T – with tines for earth moving, demolition and digging



Cutting edge hardness

Order no.	Width in m	Volume heaped in m ³	Volume level heap in m³	CUTTING EDGE Brinell 500 HB	Weight in kg	Tines	
3436990	1,50	0,60	0,52	150 x 16	177	5	
3437000	1,70	0,68	0,59	150 x 16	196	6	
3437010	1,90	0,74	0,64	150 x 20	249	6	
3437020	2,05	0,81	0,70	150 x 20	266	7	
3437030	2,20	0,87	0,76	150 x 20	316	7	
3437040	2,40	0,94	0,82	200 x 20	359	8	
3459300	2,60	1,01	0,88	200 x 20	385	8	

Combined levelling and grabbing bucket (4-in-1) — four functions at once: shovelling, grabbing, levelling, rapid emptying



Order no.	Width in m	Volume heaped in m³	Weight in kg		
3492030	1,70	0,60	350		
3492040	1,90	0,67	368		
3492050	2,10	0,77	400		
3rd control circu	uit required				

Gripping legends and digging marvels. Our STOLL buckets get to grips with power, hand in hand with our ProfiLine.



Grab it!

Whether in animal husbandry or biogas plants — silage is everywhere.

- For all silage-related processes there is a suitable Profiline tool from STOLL.
- Effective and comfortable each tool can be easily and precisely controlled.
- Our tip: the large grapple buckets have a huge volume. In biogas plants you can easily keep up with wheel loaders.







Mulit-purpose bucket HD

Order no.	Width in m	Volumen in m³	Opening width in mm	Weight in kg	
3650010	1,50*	0,62	1.320	355	
3650020	1,70*	0,71	1.320	386	
3650030	2,05	0,85	1.320	443	
3650040	2,20	0,92	1.320	472	
3650050	2,50	1,00	1.320	512	
Side plate (detail	s per set)				
3659430					
Lateral teeth (de	tails per set)				
3659420					
3rd control circu	uit required				

^{*}Solange der Vorrat reicht.

Bucket with grapple – the universal implement for silage handling: thanks to the closed bottom, also wet and/or loose material can be handled

Order no.	Width in m	Volumen in m³	Opening width in mm	Weight in kg
3547610	1,50	0,59	1.290	292
3547620	1,70	0,67	1.290	314
3547630	2,05	0,82	1.290	373
3547650	2,20	0,88	1.290	423
3547640	2,40*	0,97	1.290	446
Side panel option	onal (details per un	it)		
3548350				
3rd control circ	uit required			


^{*}Solange der Vorrat reicht.

Fork with grapple – perfect to transport silage or manure

Order no.	Width in m	Volume heaped in m ³	Tines bottom	Opening width in mm	Weight in kg	
3429090	1,30	0,54	7	1.300	226	
3429100	1,50	0,63	8	1.300	249	
3429110	1,70	0,71	9	1.300	268	
3429120	2,05	0,87	11	1.300	304	
3430650	2,40	1,02	13	1.300	355	
3rd control circ	uit required					







Silage cutters Profi-Cut – for taking portions of silage; the serrated edge ensures a straight cut

Order no.	Width in m	Volume heaped in m ³	Depth in mm	Opening width in mm	Number of tines	Weight in kg	
3334760	1,28	0,87	790	856	10	500	
2449320	1,52	1,05	790	856	13	530	
3306680	1,88	1,28	790	856	16	730	
Shove off device	е						
3521560							
3rd control circ	uit required With	width 1,88 two sh	ove off devices req	uired.			


Round bale cutter – to cut silage bales, without the driver getting off and without an additional implement

Order no.	Height (closed) in m	Height (open) in m	Width/length in mm	Maximum bale width in mm	Maximum bale Ø in m	Maximum bale weight in kg	
3591570	0,85	1,75	1,82/1,10	1,40	1,55	1.400	
3rd control circu	uit required						

Manure fork – for handling manure. The arrangement of the tines prevents load loss

Order no.	Width in m	Tine length	Number of tines	Weight in kg		
3364760	1,25	810	7	125		
3364690	1,50	810	8	145		
3364520	1,75	810	10	165		
Lateral tine (deta	ails per set)					
3534780						
3611820	2,00	810	11	243		
3611830	2,00	1.100	11	264		
3611930	2,25	1.100	12	288		
3660460	2,50	1.100	14	318		
Lateral tine (deta	ails per set)					
3534780						
Loading grill						
3599680	2,00			40		

Even wheel loaders are quaking in their boots. Pros for the ProfiLine.



Order no.	Width in m	Opening width in mm	Volume in m³	Weight in kg
3574710	1,60*	1.480	0,88	509
3574720	1,80	1.480	1,00	550
3618550	2,00	1.480	1,10	615
3574730	2,20	1.480	1,21	640
3574740	2,50	1.480	1,38	750
3582960	2,80	1.480	1,54	830

Corn tine optional (details per set)

3635370

3rd control circuit required / *Does not fit on ROBUST 30.1 / 40.1

Disposer bucket — multi-functional implement, especially for bulky goods

Order no.	Width in m	Opening width in mm	Volume in m³	Weight in kg
3591550	1,80	1.480	1,00	557
3632970	2,00	1.480	1,10	605
3591560	2,20	1.480	1,21	636
3602920	2,50	1.480	1,38	762
Side plate optio	nal (details per set;			
3635380				
3rd control circ	uit required / *Do	es not fit on ROB	UST 30.1 / 40.1	







To the Bales get set, go!

Every summer is high season for bales – prepare yourselves in good time: with STOLL bale tools.

Whether round or square bales, with foil or without: At STOLL you can always find the right tools.







Wrapped bale handler — perfectly suitable for foil wrapped round bales: there are no sharp edges that can damage the foil

Order no.	Weight in kg								
2364610	225								
For round bales Ø from 1,00 m to 1,80 m / for square bales Ø 1,60 m 3rd control circuit required									

Wrapped bale handler-Pro H — for the safe handling of round and square wrapped bales

Order no.	Weight in kg								
3395020	305								
Largest / smallest opening: 2,05 m / 0,65 m Effective depth: 1,20 m Transport width: 1,35 m for square and round wrapped bales									

Bale carrier rear — for the transport of round and wrapped bales in the rear

Order no.	Weight in kg						
3336750	115						
Tractor rear three-	point linkage or de	vice triangle Gripp	oing area from 0,94	m to 1,34 m in 5	cm intervals / Lift a	rm boom length 1,	28 m









Bale carrier rear H – ideal for transporting round bales

Order no.	Weight in kg							
3380410	105							
For round bales I Gripping area from 0,82 m to 1,22 m / Beam length 1,28 m / Pipe diameter 0,16 m								

Maxi bale claw H – simultaneously grab, lift and load up to two bales

Order no.	Weight in kg								
2449950	150								
For round and square bales 3rd control circuit required									


Roll-type bale fork – fits all bale types

Order no.	Weight in kg								
3573240	245								
For round and squ	For round and square wrapped bales / Gripping range from 0,60 m to 1,85 m 3rd control circuit required								

Bale fork lift H – the built-in lifting device brings a height gain of up to 1,40 m

Order no.	Weight in kg							
1339660	260							
For round and square bales / lifting height gain of 1,40 m to the normal height 3rd control circuit required								

Anyone can pile it on thick, but only a few are true to their word. Our pallet and bale forks are real experts in their field.

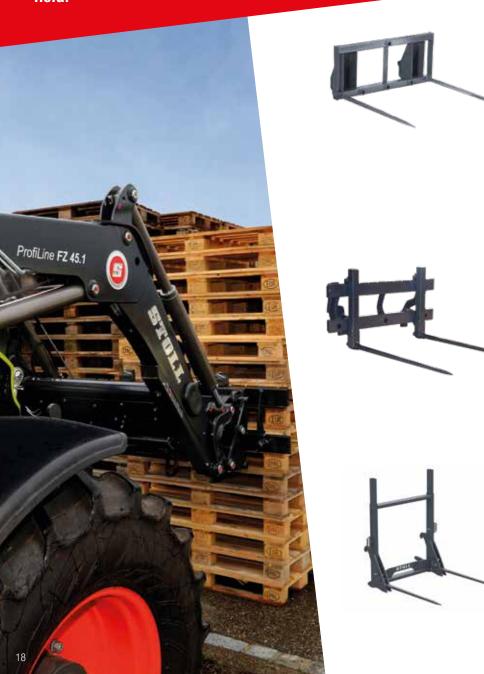

Bale spike H – variable tine placing – so the spike suits all bales

Order no.	Lifting capacity in kg	Tine in mm	Weight in kg								
3378240		1x800/1x1.200	92								
3411860		2 x 1.200	95								
Frame											
3385190	1.000		76								
Heavy duty tine	s (per unit)										
1330130		1.200	9								
Heavy duty tine	Heavy duty tines (per unit)										
0476240		800	5								
For round and squ	For round and square bales I Additional tines can be retrofitted										

Big bale fork HS – the distance between the tines can be easily changed. Pallet fork tines can also be mounted onto these frames

Order no.	Tine in mm	Weight in kg							
3684190	1.200	140							
3684200	1.200 foldable	175							
Frame HS	Frame HS								
3654340	-	110							
Frame HS (detail	s per unit)								
2400050	1.200	20							
3331520	1.200 foldable	23							
For round and squ	uare bales								

Big bale fork – for safe transport of multiple stacked bales

Order no.	Tine in mm	Weight in kg	Payload in kg							
3611920	1.200 foldable	147	1.000							
For round and square bales. For safe empty driving on public roads, the bale tines can be folded upwards.										

Every-thing alright.



Lifting, loading, stacking – with STOLL pallet forks for your Profiline you will always work precisely:

- These pallet forks are particularly sturdy because STOLL places a high value on robust construction and top-quality materials.
- You can position the tines exactly how you need them for your work. The tines can be moved by hand.
- The largest pallet fork lifts up to
 3.5 t and belongs in the top class of front-loader tools.





Pallet fork HD — the forks can be moved freely — the driver can also mount bale tines to the frame

Order no.	Lifting capacity in kg	Tine in mm	Weight in kg								
3646850	2.500	1.200	199								
3654360	1.600	1.200	169								
3654370	1.600	1.000	161								
Frame HD											
3654340	2.500		97								
Pallet tine HD (p	er unit)										
3570730	1.250	1.200	51								
3570720	800	1.200	36								
3570710	800	1.000	32								
Frame includes 3	Frame includes 3 bushes for bale tines										

Pallet fork HD with side shift

Order no.	Lifting capacity in kg	Tine in mm	Weight in kg						
3614380	2000	1.200	257						
Frame HD									
3666450	2.000		155						
Pallet tine HD (p	er unit)								
3570730	1.250	1.200	51						
Side shift +/- 145	Side shift +/- 145 mm 3rd control circuit required								

Pallet fork HS 1500 – in addition to the pallet fork tines, as many as four bale tines can be mounted on the frame

Order no.	Lifting capacity in kg	Tine in mm	Weight in kg		
3430830	1.600	1.000	185		
3434900	1.600	1.200	200		
Frame HS 1500					
3434840	1.600		115		
Pallet tine HD (p	er unit)				
3570710	800	1.000	43		
3570720	800	1.200	66		

Liftingaids.

Heavy lifting – light work

The declared goal of our STOLL engineers is developing tools to make farming more efficient. With reduced manpower and robust technology you can manage your daily tasks much more easily. Your ProfiLine will also feel the benefit.

Woodlands also need STOLL. We give you the best support in forestry operations. Because our your woodlands are worth it.



Bigbag-Lift — especially developed for bulk bags with one or two loops. The implement raises the load 1,5 m above the implement rotation point — so the view is guaranteed to be free

Order no.	Payload in kg	Weight in kg	Lifting height above implement pivot point in mm		
3602900	1.000	115	1.500		



Bag-Lift H – perfect for bulk bags with four loops

Order no.	Payload in kg	Weight in kg	Lifting height above implement pivot point in mm		
2357100	1.000	180	500		
For bulk bags up	to 1.000 kg				



Loading Hook – for good balance during transport: the load is centered near the front axle

Order no.	Lifting capacity in kg	Weight in kg			
2309670	2.000	16			
The hook is swive	el mounted				

Ideal for Timber and Forestry.

Wood making – STOLL forestry implements ensure effective work.

The log fork H and the log fork are specialists in forestry.



Log fork H with hydraulic top-loading grip — gripping of logs with the top loading grip — so nothing is lost

Order no.	Grip opening in m (clear width)	Weight in kg			
3390260	1,04	235			
3rd control circ	uit required				



Log fork H – for the transport and bunching of logs

Order no.	Weight in kg			
1317750	150			

Top loading grip — the ideal complement to the pallet fork, to retrieve or load logs




Order no.	Opening width in mm	Weight in kg				
3548990	1.385	79				
For pallet fork HD	and HS 1500 (mu	ıst be ordered sepa	arately) – 3rd cont	trol circuit require	ed	

The smart extra.







Order no.	Weight in kg			
3405440*	40			
3405090**	36			
*F b- - #	UO CIUR ATT	 * F	 000 110	

Safety grill – so nothing slips: secures the load to the rear

Order no.	Weight in kg			
3570550	23			
For hig hale fork I	HS and nallet fork H	ID.		

14 Deg Adapter – thanks to the improved tilt angle everything stays inside the bucket

Order no.	Weight in kg					
3522000	12					
To improve the tir	ning angle (crowd)	(eat- 2 hrackate inc	el ecrawe) _ fite on	ly for huckate and i	manura forke	

Three-point-linkage-adapter – for the rear-mounted hook implements

Order no.	Weight in kg					
3386990	60					
For hook impleme	ents in 3 point rear	mounting, lifting ca	pacity 1,5 t at the	coupling point of th	e lower linkage	







conversion of hook implements to Euro standard

Order no.	Weight in kg		
1334090	19		
1 Set cpl. connec	tion plates (left + ri	ght)	

Hooks and eyes – the individual set for conversion to hook implements

Order no.	Weight in kg		
3320080			
1 Set cpl. connect	tion plates (left + ri	ight)	

Implement stand – everything tidy: the ideal storage space for up to four implements

Order no.	Width in m	Height in m	Weight in kg	
3523120	1,22	2,40	150	
Delivery without in	mplements.			

Attachment frame

Order no.	Weight in kg		
Attachment frame	Euro to (MX) - FR		
3331970	44		
Attachment frame	Euro to Faucheux		
3551060	44		
Set of hooks for a	ttachement frame E	Euro-TR	
3603560	14		
Attachment frame	Euro to Tenias		
3664360	70		





you all the time.

Every tool fits – even those by other manufacturers

• Our customers can attach all tools with a Euro attachment to STOLL front-loaders in the ProfiLine series and the Solid.

STOLL thinks globally and liberally. That's why, in our range, you will also find smart special solutions for

ProfiLine, if that's what your life requires. STOLL supports

• Even coupling systems from other manufacturers fit with these front-loaders – with our combo-change frame.





Euro

Euro + Alö





Euro + (MX) - FR

Euro + SMS





Attachment frame

Classic all-rounder.

The Solid stands out for its flexible usage possibilities: Everything in the usual top STOLL quality with an exceptional price/performance ratio. Here you will find the extensive global tool range that fits the Solid.

- · Easy to handle
- Flexible implementation
- · Long working life

Pallet fork – pallet loading made easy. Thanks to its sturdy construction, you can pick up to 1.000 kg at a time with the pallet fork. Adjust the spacing of the pallet tines to suit your needs.



Order no.	Lifting capacity in kg	Tine in mm	Weight in kg					
Pallet fork								
3567980	1.000	1.000	113					
Frame								
3567990	1.000	-	59					
Pallet tine (per u	Pallet tine (per unit)							
3570700	500	1.000	27					



Wrapped bale handler — so your wrapped bales remain undamaged. The wrapped bale tongs have no sharp edges and have been developed specifically for the transportation and loading of wrapped bales.

Order no.	Opening width in mm (largest/smallest)	Weight in kg						
3571470	1.400/800	114						
For round bales ø	For round bales ø from 0,80 m to 1,40 m, 3rd control circuit required							


Bale spike — a spike for all bales. Transport round and square bales easily and safely with the bale spike. The tines can be placed in four positions in the frame, depending on the application.

Order no.	Lifting capacity in kg	Tine in mm	Weight in kg			
3611810	700	2x800	68			
3608420	700	2x1.200	76			
Frame						
3608430			58			
Tine						
0476240		800	5			
Tine						
1330130		1.200	9			
The bale spike ha	s been developed f	or the handling of r	ound and square b	ales.		

Universal bucket — ideal for light to moderate use. Your loose bulk material can also be easily loaded.



Order no.	Width in m	Volume heaped in m³	Volume level heap in m³	Weight in kg		
3550490	1,40	0,45	0,36	99		
3550500	1,60	0,52	0,41	109		
3550510	1,85	0,61	0,48	131		
3550520	2,10	0,70	0,55	171		





Compact loaders.

Ideal for all tasks — the extensive CompactLine tool range remain impressive in tight situations.

- Shovelling, grabbing or loading STOLL tools offer the right solution for all tasks.

 Round about the house and farmyard, forest, garden and landscaping!
- For the driver to have unobstructed sight of the working zone, all tools have a Skid Steer attachment.
- Even the small ones have great power: the light and compact construction of these tools fits perfectly with the CompactLine.

The sandpit's over. Our Compact-Line buckets load, shovel and grab like the big boys.

Bucket – for all loading work



Levelling and grabbing bucket (4-in-1) – four functions at once: digging, grabbing, levelling, rapid emptying

Order no.	Width in m	Volume heaped in m³	Weight in kg						
3490770	1,40	0,19	145						
3490780	1,57	0,22	160						
3rd control circ	3rd control circuit required								

Bucket with grapple – the universal gripper, because thanks to the closed bottom, wet and/or loose material can also be transported

Order no.	Width in m	Height in m	Depth in m	Opening in mm	Weight in kg			
3535300	1,20	0,67	0,60	950	115			
3535310	1,45	0,67	0,60	950	130			
3rd control circuit required								







Whether it's bale-handling, pallet loading, log moving or other tasks, compact STOLL tools are all-rounders. They work daily to stand up to tricky, highly diverse tasks.



Fork with grapple — ideal to retrieve and load manure, compost, shrubs and silage

Order no.	Width in m	Height in m	Dept in m	Opening width in mm	Weight in kg					
3535320	1,20	0,69	0,61	950	120					
3535330	1,45	0,69	0,61	950	135					
3rd control circu	3rd control circuit required									



Grip fork – a must in forestry and landscape maintenance: With the strong tines it grabs bulky tree trunks and branches.

Order no.	Width in m	Opening width in mm	Weight in kg				
3508220	1,15	870	130				
3rd control circuit required							



Manure fork – for loading of farmyard manure and compost

Order no.	Width in m	Height in m	Depth in m	Weight in kg		
3509620	1,21	0,56	0,67	68		
3535290	1,45	0,56	0,67	79		

Bale spike – compact bale handling in narrow courtyards or stables



Order no.	Tine in mm	Weight in kg	Lifting capacity in kg			
3486330	800	60	1000			
Frame						
3486100	-	36				
Bale tine (per un	it)					
3486320	800	12				
Optional pallet t	tine (per unit)					
3486290	800	12				

Pallet fork – the classic to load pallets



Order no.	Lifting capacity in kg	Tine in mm	Weight in kg				
3486070	1.000	800	60				
Frame							
3486100	500	-	36				
Bale tine (per unit)							
3486290	500	800	12				
Optional pallet tine (per unit)							
3486320	800	800	12				

Top loading grip — the ideal complement to the pallet fork, to retrieve or load logs



Order no.	Opening width in mm	Weight in kg					
3520780	870	40					
For CompactLine pallet fork (has to be ordered separately) 3rd control circuit required							



Log grapple – grab and load logs individually

Order no.	Width in m	Opening width in mm (max.)	Weight in kg				
3556810	0,29	750	115				
Log grapple without boom (can be combined with boom of shovel)							
611140							
Rotator optional							
3601520							
3rd control circuit required							



Shovel – dig narrow, deep trenches – up to 1,16 m below ground level


Order no.	Width in m	Working depth below ground (m)	Swivel angle	Weight in kg					
3557480	0,30	1,16	118°	105					
Digging shovel	Digging shovel without boom (can be combined with arm of log grapple)								
3611160									
Boom Ditching	Boom Ditching shovel								
3599580	0,80								
3rd control circ	3rd control circuit required								



Three-point-adapter — for the rear mounting of implements for CompactLine onto tractors

Order no.	Payload in kg	Weight in kg			
3601100	500	38			

Looking for an implement to compliment your other brand of loader? We are here to help. That's exactly why we have constructed adapter frames for the CompactLine that allow you to complete your tractor and a previously owned loader from a different brand with our tools.



Attachment frame Euro-Skid – mount implements with Euro-connection onto a Skid Steer attachment frame

Order no.	Weight in kg		
354731	0 23,5		



Implement adapter for John Deere Compact Front Loader – real STOLL quality on John Deere compact loaders

Order no.	Weight in kg		
3571680	30		



Wilhelm STOLL Maschinenfabrik GmbH Bahnhofstr. 21 | 38268 Lengede Telephone: +49 (0) 53 44 / 20-0 Fax: +49 (0) 53 44 / 20-182