




Kubota M95 - 105 GX IV -serie (TIER 4 FINAL)

95 - 105

- No limitation of both the steering angle and ground clearance for maximum maneuverability
- Very durable construction due to 25mm thick side plates reaching clutch housing
- Full engine power transferable with standard PTO
- Less maintenance due to the homokinetic joint

Afbeeldingen



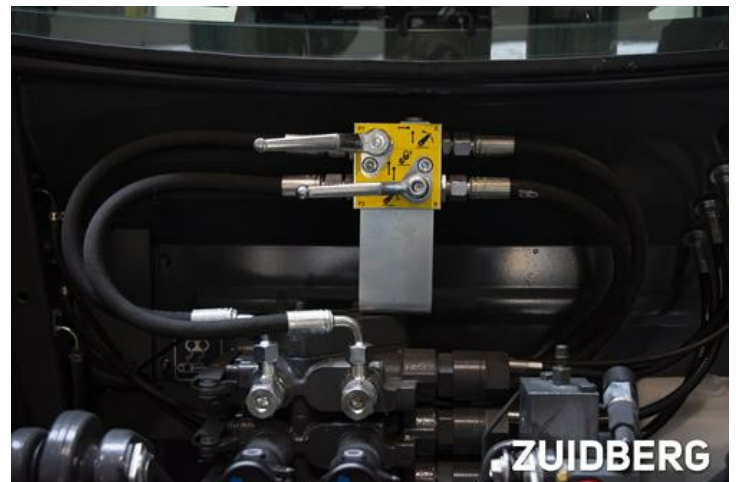

Front linkage system design

- Front linkage 28 kN without additional support
- Top plate ready for fitting of front hydraulics and chain hooks
- Can be set to a single-acting, double-acting and transport position with the multi-valve supplied as standard
- Removable linkage arms with a transport, fixed and oscillation setting
- Comes with high quality Walterscheid lifting hooks
- Perfect design due to tractor-specific connections
- Supplied with a top link, balls and towing hook

Front PTO system design

- Output shaft can always be rotated over 60 degrees for maximum ease of connection
- PTO clutch engagement time variable to ensure smooth engagement
- Non-rotating output shaft in unloaded condition
- Oil immersed clutch plates ensures a long service life
- Supplied with protective cover for PTO stump

Additional Info

- Supplied professional installation manual in 4 languages simplifies installation
- Integrated oil system guarantees rapid PTO installation as it is independent of the tractor's hydraulic system
- PTO includes measuring points for easy locating of faults
- PTO is activated by means of the supplied switch for use inside the cabin