

GREEN.RAKE combi



GRASSLAND MAINTENANCE 4 IN 1.

Leveling, raking, sowing, rolling – with the **GREEN.RAKE combi** you can do it all in just one operation. Despite its scope of performance, it's the compactness of this combined machine that stands out.

Three rake rows built into a robust frame make the **GREEN.RAKE combi** not only stable, but at the same time easy to pull and manoeuvre. The three-point attachment is particularly practical. The height-adjustable tine section guarantees a perfect working pattern.

The integration of a greater number of rake tines compared to the **GREEN.RAKE classic**, makes the **GREEN.RAKE combi** even better for ground aeration. The tines are arranged at a distance of 65 mm and aid the intensive raking out of tangles and weeds. We particularly recommend the use of the **GREEN.RAKE combi** for grassland maintenance in spring and for sowing catch crops in autumn.

TECHNICAL DATA

Working widths in m	3/4.5/6
Ring type	Cambridge Ø 460 (3 m, 4.5 m, 6 m)
	Toothed ring (3 m, 4.5 m)
Weight in kg ¹	1,300/2,100/2,580
Number of tine rows	3
Tine spacing in mm	75/65/65
Tine diameter in mm	10
Transport width mm	2,930/2,990/2,990


ADVANTAGES:

- + 4 in 1: levelling, raking, sowing, rolling in just one operation
- + Optimum adjustment to the ground
- + Compact structure


¹Weight for **GREEN.RAKE combi** Cambridge Ø 460

POTENTIAL APPLICATIONS:


- Raking out of weeds with simultaneous reconsolidation of the soil
- Pressing the seed down for the best possible soil contact
- Complete springtime grassland maintenance in one operation
- Intercropping in Autumn

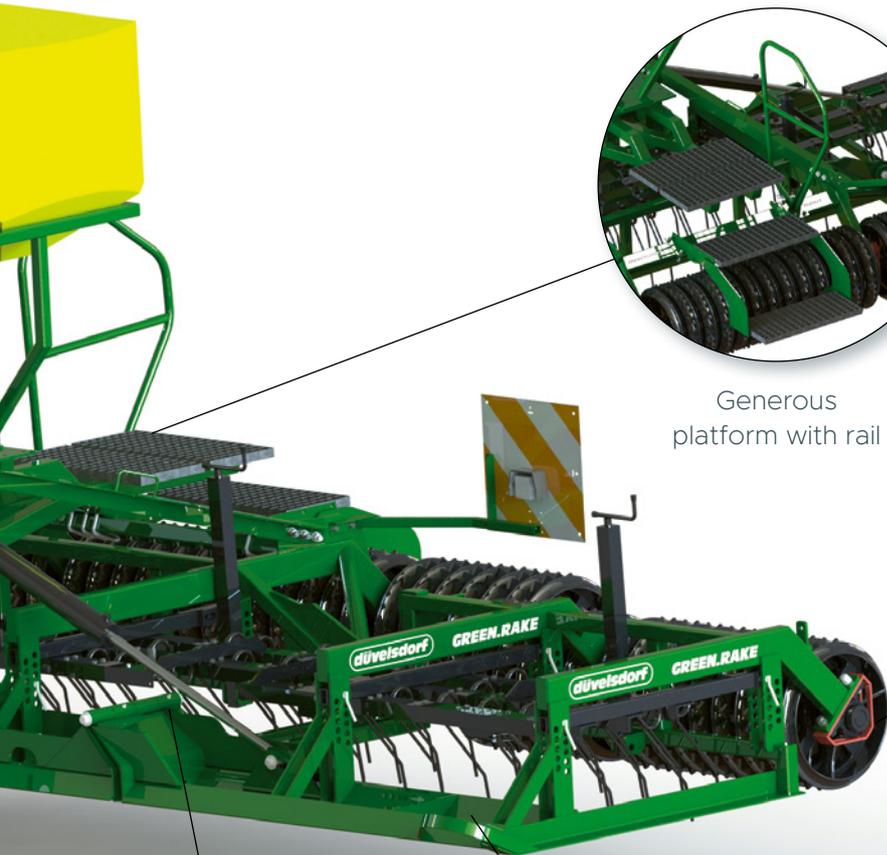

Generous platform with rail

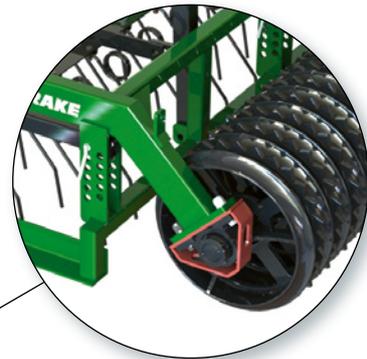

Large protected bearings

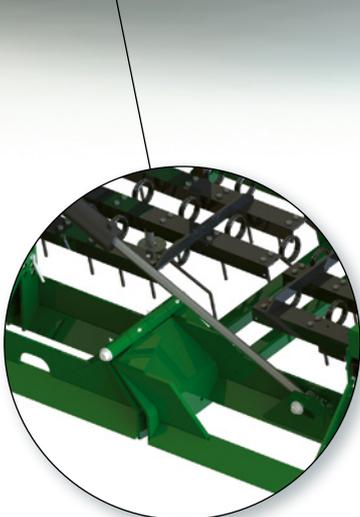

Robust hinge



Levelling bar made from double angle iron

