


SENSORS & ACCESSORIES

SOFTWARE

The software package includes the standard version "Power Control" and the following extensions:

- Connection for Dynamometer via RS-232.
- Measuring channels can be switched on or off.
- Recording interval from 1 second steps upward.
- Directly readout of every value.
- Readout as graphic and table.
- Individual designation of the channels.
- Configuration of the sensors.
- Offset for the sensors.

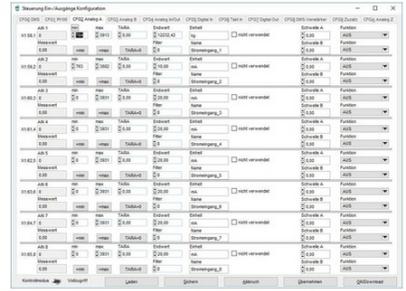

REVOLUTION SENSOR

Item No.	Mess-009
Description	Optical sensor with reflective marker
Cable length	7,5 m
Range	1 – 250.000 1/Min
Distance to target max	up to 1m, 45°



GAS SENSOR FOR CRANKCASE

Item No.	Mess-017
Range	variabel
Accuracy	0,5% from value
Connection	Hose
Type	Ovalgear



AMPÈRE GAUGE

Item No.	Mess-015
Range	up to 600 A
Accuracy	1% from value
Connection	Claw
Type	Induction



HYDRAULIC FLOW SENSOR

Item No.	Mess-018
Range	0 to 150 l/min (opt. – 250l/min)
Accuracy	0,1% from value
Connection	Coupling plug hoses 1 m.
Type	Ovalgear



INFRARED THERMOMETER

Item No.	Mess-016
Range	0 to 700°C
Accuracy	1% from value
Connection	not necessary
Type	Infrared



PULTAB

Item No.	Mess-019
Range	up to 12000 daN
Accuracy	0,05% from value
Connection	Shackles
Type	DMS-Technik